

**SPECIFICATIONS:**


<b>Electrical:</b>	
Frequency range	400 – 3000 MHz
VSWR	< 2:1
Nominal input impedance	50 Ω DC grounded
Connector	N-type female
Feed power handling	250 W CW
Gain	> 6.5 dBi typical
E-plane 3 dB beamwidth	≥ 65°
H-plane 3 dB beamwidth	≥ 110°
Polarisation	Vertical / horizontal Configurable at installation
Front-to-back ratio	≥ 15 dB
<b>Mechanical:</b>	
Dimensions (w x l)	460 mm x 580 mm
Material	Aluminium, fibreglass
Total mass	< 10 kg incl. mounting bracket
Mounting method	Bracket onto a mast
Packaging	Transportable bag or crate
MTBF	500,000 h
<b>Environmental: designed to meet the following specifications</b>	
Wind survival	200 km/h
Temperature	-35 °C to 71 °C
Effective wind area	0.3 m <sup>2</sup>
Corrosion	Appropriate anti-corrosion measures are taken in the design of antenna for harsh environmental conditions.

**PRODUCT DESCRIPTION:**

The LPDA-A0084 directional log-periodic dipole array (LPDA) is designed for high-power applications. It covers a frequency band of 400 to 3000 MHz with a gain of 6.5 dBi

The antenna is completely encapsulated in a radome. The antenna is provided with a mounting bracket allowing it to be mounted for horizontal or vertical polarisation

**PRODUCT FEATURES:**

- Wideband frequency 400 to 3000 MHz
- VSWR < 2.0:1
- Moderate gain: 6.5 dBi
- Rugged construction
- Ice resistant

**PRODUCT APPLICATIONS:**

- Wideband high-power

# High-Power LPDA Antenna


400 – 3000 MHz

Product Code: LPDA-A0084


VERSION: 2.4

## VSWR AND GAIN GRAPHS:

### SIMULATED VSWR:

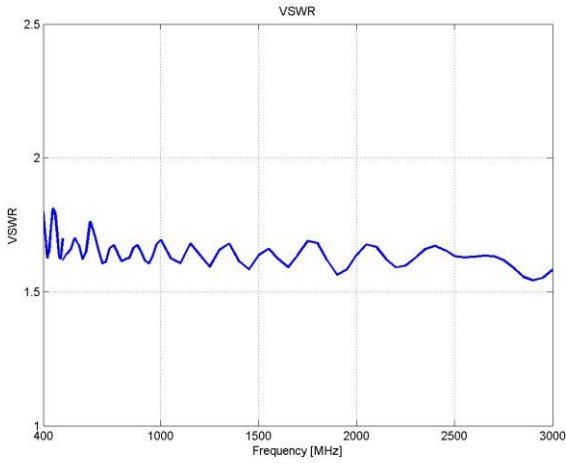

### SIMULATED GAIN:

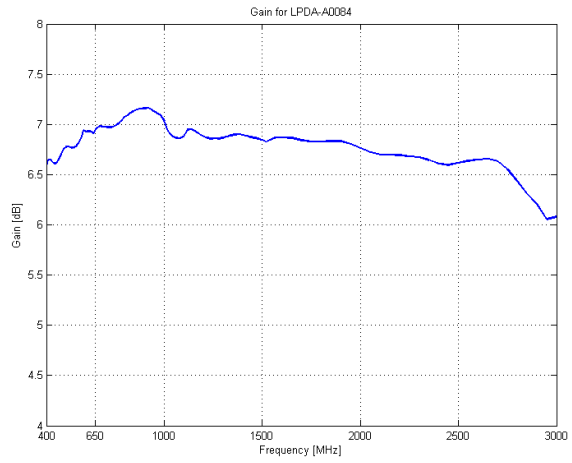

## RADIATION PATTERNS:

